

GAMMASTONE MOSAIC AIR

THE PANEL IS COMPOSED OF:

- AN CERAMIC OR GLASS MOSAIC SLAB
- A STRUCTURAL CORE INSERTED BETWEEN TWO FIBREGLASS LAYERS
- A STAINLESS STEEL PLATE HAVING A THICKNESS OF 0,5 MM.

The GammaStone Mosaic AIR solution allows mechanical installation of ceramic or glass mosaic with the advantage of fast installation and beautiful aesthetics. The panel is supplied with epoxy resins within the joints and ready for installation. The joint between panels is designed to provide a unique-mosaic effect on the entire façade.



GammaStone MOSAIC AIR

OFFICE



Representative pictures of a possible installation

COLOURS



BIANCO-ORO



BIANCO MADREPERLA



NERO BRONZATO



MADREPERLA



LILLA



OCEANO



GIALLO ORO



NERO LUCIDO




LENA



SEPPIATO



BRONZO-ORO

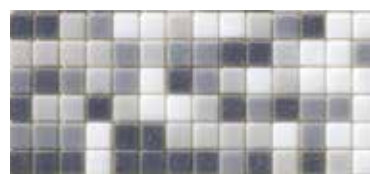

GRIGIO-BIANCO



SABBIA



BRONZO



BIANCO PERLA




BIANCO-BRONZO



MARNE



CELESTE MARINO

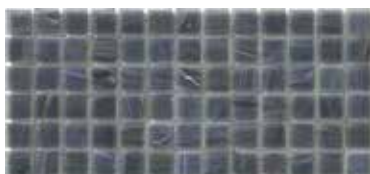

NIL



NERO FIAMMATO



ORO MADREPERLA




ORO




ARGENTO



BIANCO LUCIDO

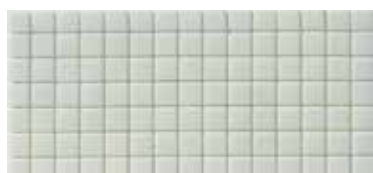

BIANCO CANDIDO

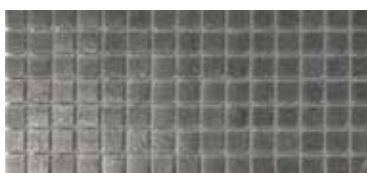

GRIGIO ARGENTO




BLU OLTREMARE



ROSÈ



ORO SCURO

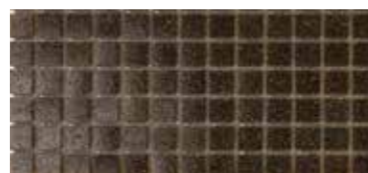


MARRONE CANGIANTE


SIZES



Section

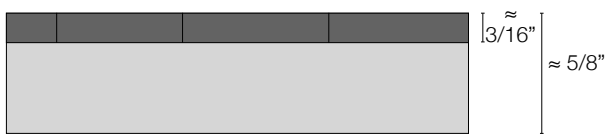


Section

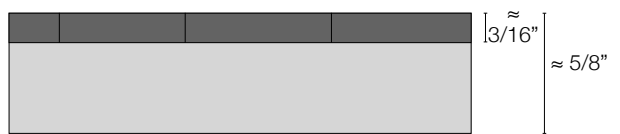



Section

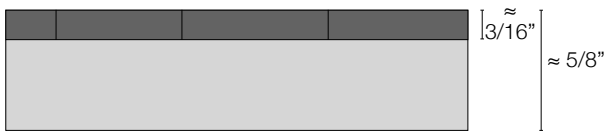

Max panel sizes	38,19"x38,19" (10,13 sqft)
Total panel thickness	≈ 5/8"
Mosaic thickness	≈ 3/16"
Panel weight	3.3 lb/sqft

Closed joint solution

